

产品说明 Product Description

LYD2-B 系列提前预放避雷针均采用不锈钢材料，对应不同的保护范围，每种型号分别有不同性能的特征。

LYD2-B series lightning rod are made from stainless-steel material,it has different protection area and various features.

- 优点：

非电子式，寿命长。

雷击后防护质量不会改变。

不同保护半径的型号选择

完全主动式引雷系统。

当有闪电时，才会有自我激活。

外型美观。

无需维护。
- Features:

Not electron style,life long.

Keep the good performance after lightning stroked.

Various protection radius.

Tracing the lightning in advance and conducting it to the erth completely.


It would be activated only have lightning and thunder.

Artistic outline.

Safety and reliable.

Without maintenance.

产品结构 Product Structure

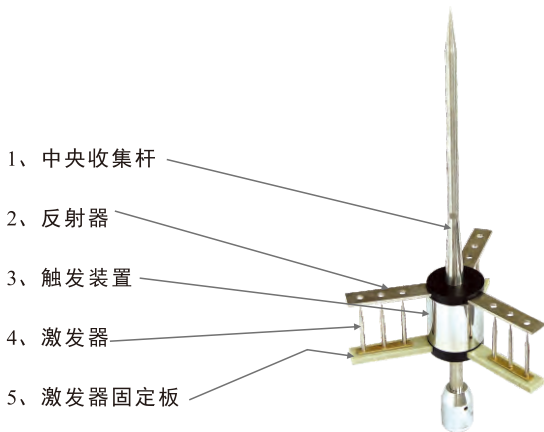

- 1、中央收集杆

2、反射器

3、触发装置

4、激发器

5、激发器固定板
- 1、Center collection pole

2、Reflection device

3、Touch-off device

4、Activation device

5、Board of fix activation device

激发器与反射器、中央收集杆绝缘。  
Insulated between activation device,reflection device and center collection pole.

反射器上对应的每个激发器有一个圆孔，并且反射器与中央收集杆与大地良好电气连接，激发器底座由合成树脂做成，适用于任何腐蚀环境。  
Reflection device have each one hole which opposite to activation device,reflection device,center collection pole connected to the earthing.The base of activation device made from polyvinyl,it's splicable to any corrupt environment.

LYD2-L 类保护（高度保护）=20m LYD2-L Type Protection(Protection High)=20m

避雷针保护半径R(m) 型号 Model	避雷针高度H(m)							
	5	6	7	8	10	15	最高20米	
LYD2-L-3.1	22	22	22	23	24	24	25	
LYD2-L-3.3	42	42	43	43	43	44	45	
LYD2-L-4.3	51	51	52	52	53	53	54	
LYD2-L-5.3	61	61	61	61	62	62	63	
LYD2-L-6.3	70	70	70	70	71	71	72	